


EWP

Environmental World Products

PANEL




FLOW METERS

Technical Specifications

Range	1 GPM to 200 GPM
Maximum Pressure	150 PSI
Maximum Temperature	176° F
Body Material	Lucite (Acrylic)
Float material	316L SST
Guide Rod Material	316L SST
Connection Material	ABS Plastic
Connection Type	NPT

IN-LINE

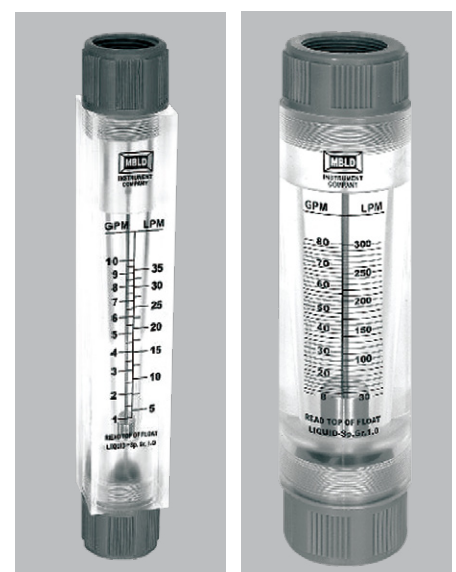

Panel Flow Meters

Model	GPM	Connection	A	B	C
LZT-1001	0.1 - 1.0	1/2" NPT	5.00	1.40	2.65
LZT-1001-V (valve)	0.1 - 1.0	1/2" NPT	5.00	1.40	2.65
LZT-1002	0.2 - 2.0	1/2" NPT	5.00	1.40	2.65
LZT-1002-V (valve)	0.2 - 2.0	1/2" NPT	5.00	1.40	2.65
LZT-1005	0.5 - 5.0	1/2" NPT	5.00	1.40	2.65
LZT-1005-V (valve)	0.5 - 5.0	1/2" NPT	5.00	1.40	2.65
LZT-2510	1 - 10	1" NPT	6.50	1.75	3.35
LZT-2520	1 - 20	1" NPT	6.50	1.75	3.35

In-Line Flow Meters

Model	GPM	Connection	A	B	C
LZT-1001-G	0.1 - 1.0	3/8" NPT	6.30	8.30	1.25
LZT-1002-G	0.2 - 2.0	1/2" NPT	6.30	8.30	1.25
LZT-1005-G	0.5 - 5.0	1/2" NPT	6.30	8.30	1.25
LZT-2510-G-S	1 - 10	1" NPT	9.00	11.60	1.75
LZT-2520-G-S	2 - 20	1" NPT	9.00	11.60	1.75
LZT-4004-G-S	4 - 40	1-1/2" NPT	9.05	11.90	2.70
LZT-4006-G-S	6 - 60	1-1/2" NPT	9.05	11.90	2.70
LZT-4008-G-S	8 - 80	1-1/2" NPT	9.05	11.90	2.70
LZT-4010-G-S	10 - 100	1-1/2" NPT	9.05	11.90	2.70
LZT-5015-G	50 - 150	2" NPT	12.20	15.00	3.75
LZT-5020-G	40 - 200	2-1/2" NPT	12.20	15.00	3.75

