







Swing Bolt Multi Round Filter Housings Data Sheet

- Electropolished/Glass Bead 304 or 316 Stainless Steel.
- Swing Bolt Design for Safe/Easy Operation.
- Accepts DOE, 222/Flat or 222/Fin Cartridges.
- Heavy duty legs included on all models.
- Vented lid and Clean and Dirty Drains on all models.
- Two gauge ports on inlet and outlet on all models.
- Flow rates up to 2,380 gpm $9,009 \text{ lpm} 649 \text{ m}^3/\text{hr}$.
- NSF/ANSI/CAN61 & 372 certified.

HYDROSCIENTIFIC ™ MRH / MRHS SERIES - SWING BOLT FILTER HOUSINGS

are ideal for most industrial/commercial applications with our welded leg design as a standard, (not "optional") feature, we eliminate the added expense to your application. MRH/MRHS Swing Bolt Multi Round Filter Housings are commonly used for pre-filtration for Reverse Osmosis (RO) systems, food service, car washes, agriculture and many other uses.

HYDROSCIENTIFIC ™ MRH / MRHS SERIES - SWING BOLT FILTER HOUSINGS

are made with a high grade 304 or 316 Stainless Steel as standard and accept a wide range of filter cartridges. The MRH/MRHS Series Swing Bolt Multiround Filter Housings are NSF/ANSI/CAN61 & NSF/ANSI 372 certified.






Part Number	Description	Ports (In/Out)	Drains (FNPT/ MNPT)	Gauge Port	Max. Flow (gpm)	Max. Flow (Ipm)	Max. Flow (m³/hr)	No. of Cartridge
MRH-410-2	HydroScientific™ SB 4 x 10″ Multi Filter Housing, ML, EP	2"FNPT	3/4" MNPT	1/4" FNPT	28	106	6	4
MRH-420-2	HydroScientific™ SB 4 x 20″ Multi Filter Housing, ML, EP	2"FNPT	3/4" MNPT	1/4" FNPT	56	212	13	4
MRH-430-2	HydroScientific™ SB 4 x 30″ Multi Filter Housing, ML, EP	2"FNPT	3/4" MNPT	1/4" FNPT	84	318	19	4
MRH-440-2	HydroScientific™ SB 4 x 40″ Multi Filter Housing, ML, EP	2"FNPT	3/4" MNPT	1/4" FNPT	112	424	25	4
MRH-510-2	HydroScientific™ SB 5 x 10″ Multi Filter Housing, ML, EP	2"FNPT	3/4" MNPT	1/4" FNPT	35	132	8	5
MRH-520-2	HydroScientific™ SB 5 x 20″ Multi Filter Housing, ML, EP	2"FNPT	3/4" MNPT	1/4" FNPT	70	265	16	5
MRH-530-2	HydroScientific™ SB 5 x 30″ Multi Filter Housing, ML, EP	2"FNPT	3/4" MNPT	1/4" FNPT	105	397	24	5
MRH-540-2	HydroScientific™ SB 5 x 40″ Multi Filter Housing, ML, EP	2"FNPT	3/4" MNPT	1/4" FNPT	140	530	32	5
MRH-710-2	HydroScientific™ SB 7 x 10″ Multi Filter Housing, ML, EP	2"FNPT	3/4" MNPT	1/4" FNPT	49	185	11	7
MRH-720-2	HydroScientific™ SB 7 x 20″ Multi Filter Housing, ML, EP	2"FNPT	3/4" MNPT	1/4" FNPT	98	371	22	7
MRH-730-2	HydroScientific™ SB 7 x 30″ Multi Filter Housing, ML, EP	2"FNPT	3/4" MNPT	1/4" FNPT	147	556	33	7
MRH-740-2	HydroScientific™ SB 7 x 40″ Multi Filter Housing, ML, EP	2"FNPT	3/4" MNPT	1/4" FNPT	196	742	45	7
MRH-1230-3FL	HydroScientific™ SB 12 x 30″ Multi Filter Housing, ML, EP	3"FL	1" FNPT	1/4" FNPT	252	954	57	12
MRH-1240-3FL	HydroScientific™ SB 12 x 40″ Multi Filter Housing, ML, EP	3"FL	1" FNPT	1/4" FNPT	336	1272	76	12
MRH-2230-4FL	HydroScientific™ SB 22 x 30″ Multi Filter Housing, ML, EP	4"FL	1" FNPT	1/2" FNPT	462	1749	105	22
MRH-2240-4FL	HydroScientific™ SB 22 x 40″ Multi Filter Housing, ML, EP	4"FL	1" FNPT	1/2" FNPT	616	2332	140	22
MRH-3630-6FL	HydroScientific™ SB 36 x 30″ Multi Filter Housing, ML, GB	6"FL	1" FNPT	1/2" FNPT	756	2862	172	36
MRH-3640-6FL	HydroScientific™ SB 36 x 40" Multi Filter Housing, ML, GB	6"FL	1" FNPT	1/2" FNPT	1008	3816	229	36
MRH-5230-6FL	HydroScientific™ SB 52 x 30″ Multi Filter Housing, ML, GB	6"FL	1" FNPT	1/2" FNPT	1092	4134	248	52
MRH-5240-6FL	HydroScientific™ SB 52 x 40″ Multi Filter Housing, ML, GB	6"FL	1" FNPT	1/2" FNPT	1456	5512	331	52
MRH-8530-8FL	HydroScientific™ SB 85 x 30″ Multi Filter Housing, ML, GB	8"FL	1" FNPT	1/2" FNPT	1785	6757	405	85
MRH-8540-8FL	HydroScientific™ SB 85 x 40″ Multi Filter Housing, ML, GB	8"FL	1" FNPT	1/2" FNPT	2380	9009	649	85

TEL: 262.634.2386 | TOLL-FREE U.S.: 800.357.8538 FAX: 262.634.6259 | TOLL-FREE U.S.: 888.700.6114

EMAIL: sales@greatlakesintl.com | WEB: greatlakesintl.com

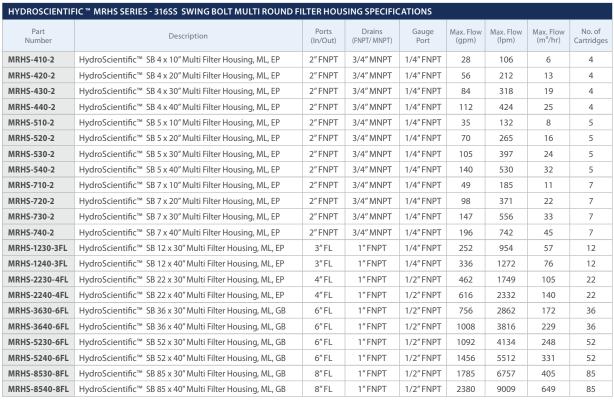

SB = SWING BOLT, ML = LEGS, EP = ELECTROPOLISH, GB = GLASS BEAD

ADDITIONAL FEATURES

Finish: Electropolished and Bead Blasted Standard

Drains: Clean and Dirty standard on all models

Gauge Ports: Clean and Dirty standard on all models

Cartridge Types: MRH DOE Style Cartridges (2-3/4" max. diameter)

All MRH Filter Housings will accept DOE, 222/Flat or 222/Fin Cartridges Standard

MATERIALS OF CONSTRUCTION

Housing Shell:304 or 316 stainless steelLid Closure:Zinc Plated SteelVent and Drain Plugs:304 or 316 stainless steelHeavy Duty Mounting Legs:304 or 316 stainless steelO-Ring / Gasket:EPDM - FDA Grade

(Viton, Silicone and EPR Options)

APPLICATIONS

- · Residential, Commercial, Industrial, and Municipal
- Reverse Osmosis Pre-filtration
- · Ground Water Remediation
- Industrial Process (High Purity) Applications
- Cooling Tower Filtration
- Process Water
- · Industrial Waste Water Treatment

OPERATIONAL DATA

Max. Working Pressure: 150 psi at 300 °F (10.3 bar at 149 °C)

Max. Operating Temperature: 300 °F (149 °C)

For the complete list of our NSF Certified products, please visit the Hydronix Water Technology page on the official NSF website: www.nsf.orq

Copyright © 2022 HydroScientific., All Rights Reserved.



DIS	TRI	BU	TEI	D BY:

LIT-MRH-SB-DS 12/15/21

MRH-MRHS_SB_DS LIT-MRH-SB-DS 12/15/2