

HARMSCO®

HP Hurricane® Filter Housings

Two Technologies in One

Lower Operation Cost

- Harmsco® HP Hurricane® filters provide unsurpassed performance. Our unique design separates dense solids prior to cartridge filtration for extended filter life, increased dirt holding capacity and reduced maintenance costs.



Certified to
ANSI-NSF 61

Excluding High Temp Cartridges



Features

- ▶ Combination cyclone separator and cartridge filter in a single compact design
- ▶ Patented Up-flow design with tangential entry - prevents air entrapment
- ▶ Rotational flow “flutters” media pleats - improving loading performance
- ▶ Electropolished 304 stainless steel housing
- ▶ Fail-Safe closure system
- ▶ Three sizes for greater media surface area
- ▶ CPVC standpipe (standard) - stainless steel optional
- ▶ Extensive choice of cartridge micron ratings and media, including carbon block
- ▶ NSF 61 listed

Applications

- ▶ Commercial/Residential Drinking Water
- ▶ Cooling Tower Filtration
- ▶ Desalination Pre-filtration (316 and coated options)
- ▶ Surface Water Treatment Rule (SWTR) I, II
- ▶ Process Water
- ▶ Whole House Filtration
- ▶ Industrial Waste Water Treatment
- ▶ Reverse Osmosis Pre-filtration
- ▶ Small Community Compliance (cysts)
- ▶ Well Water
- ▶ Ground Water Remediation
- ▶ Ground Water Under Direct Influence (GUDI)

40 90 170

Cartridge Selection

Sediment Removal, Turbidity Reduction, Chlorine Removal, Taste & Odor Reduction, Cyst Removal, Pre-Filtration, Post-Filtration, Antimicrobial Rated, Absolute Rated, Nominal Rated, 100% Synthetic, Non Potable Use, Course Filtration, High Temperature, All Polypropylene, NSF Listed, Cleanable/Reusable

Polyester - engineered for high efficiency, low pressure drops; NSF 61 Listed

HC/40-0.35	Hur 40 Cartridge - 0.35 Micron	●	●				●												●
HC/40-1	Hur 40 Cartridge - 1 Micron	●	●				●												●
HC/40-5	Hur 40 Cartridge - 5 Micron	●	●				●												●
HC/40-10	Hur 40 Cartridge - 10 Micron	●	●				●												●
HC/40-20	Hur 40 Cartridge - 20 Micron	●	●				●												●
HC/40-50	Hur 40 Cartridge - 50 Micron	●	●				●												●
HC/40-100	Hur 40 Cartridge - 100 Micron	●	●				●												●
HC/40-150	Hur 40 Cartridge - 150 Micron	●	●				●												●
HC/90-0.35	Hur 90 Cartridge - 0.35 Micron	●	●				●												●
HC/90-1	Hur 90 Cartridge - 1 Micron	●	●				●												●
HC/90-5	Hur 90 Cartridge - 5 Micron	●	●				●												●
HC/90-10	Hur 90 Cartridge - 10 Micron	●	●				●												●
HC/90-20	Hur 90 Cartridge - 20 Micron	●	●				●												●
HC/90-50	Hur 90 Cartridge - 50 Micron	●	●				●												●
HC/90-100	Hur 90 Cartridge - 100 Micron	●	●				●												●
HC/90-150	Hur 90 Cartridge - 150 Micron	●	●				●												●
HC/170-0.35	Hur 170 Cartridge - 0.35 Micron	●	●				●												●
HC/170-1	Hur 170 Cartridge - 1 Micron	●	●				●												●
HC/170-5	Hur 170 Cartridge - 5 Micron	●	●				●												●
HC/170-10	Hur 170 Cartridge - 10 Micron	●	●				●												●
HC/170-20	Hur 170 Cartridge - 20 Micron	●	●				●												●
HC/170-50	Hur 170 Cartridge - 50 Micron	●	●				●												●
HC/170-100	Hur 170 Cartridge - 100 Micron	●	●				●												●
HC/170-150	Hur 170 Cartridge - 150 Micron	●	●				●												●

High Temperature - up to 200°F (93°C)* *250°F (121°C) with metal end caps, using suffix "HTM"

HC/40-20HT	Hur 40 Cartridge - 20 Micron High Temp	●	●				●												●
HC/40-50HT	Hur 40 Cartridge - 50 Micron High Temp	●	●				●												●
HC/90-5CPHT	Hur 90 Cartridge - 5 Micron High Temp	●	●				●												●
HC/90-5HT	Hur 90 Cartridge - 5 Micron High Temp	●	●				●												●
HC/90-10HT	Hur 90 Cartridge - 10 Micron High Temp	●	●				●												●
HC/90-20HT	Hur 90 Cartridge - 20 Micron High Temp	●	●				●												●
HC/90-50HT	Hur 90 Cartridge - 50 Micron High Temp	●	●				●												●
HC/170-5CPHT	Hur 170 Cartridge - 5 Micron High Temp	●	●				●												●
HC/170-5HT	Hur 170 Cartridge - 5 Micron High Temp	●	●				●												●
HC/170-10HT	Hur 170 Cartridge - 10 Micron High Temp	●	●				●												●
HC/170-20HT	Hur 170 Cartridge - 20 Micron High Temp	●	●				●												●
HC/170-50HT	Hur 170 Cartridge - 50 Micron High Temp	●	●				●												●

Harmsco Free - 100% synthetic composite media; NSF 61 Listed

HC/40-1W-HF	Hur 40 Cartridge - 1 Micron	●	●				●												●
HC/40-5W-HF	Hur 40 Cartridge - 5 Micron	●	●				●												●
HC/40-20W-HF	Hur 40 Cartridge - 20 Micron	●	●				●												●
HC/90-1W-HF	Hur 90 Cartridge - 1 Micron	●	●				●												●
HC/90-5W-HF	Hur 90 Cartridge - 5 Micron	●	●				●												●
HC/90-20W-HF	Hur 90 Cartridge - 20 Micron	●	●				●												●
HC/170-1W-HF	Hur 170 Cartridge - 1 Micron	●	●				●												●
HC/170-5W-HF	Hur 170 Cartridge - 5 Micron	●	●				●												●
HC/170-20W-HF	Hur 170 Cartridge - 20 Micron	●	●				●												●

Poly-Pleat - 1 micron absolute, multi-layered media; NSF 61 Listed

PP-HC-40-1	Poly Pleat Hur 40 Cartridge - 1 Micron	●	●				●												●
PPFS-HC-40-1	PP-Fail Safe Hur 40 Cartridge - 1 Micron	●	●				●												●
PP-HC-90-1	Poly Pleat Hur 90 Cartridge - 1 Micron	●	●				●												●
PPFS-HC-90-1	PP-Fail Safe Hur 90 Cartridge - 1 Micron	●	●				●												●
PP-HC-170-1	Poly Pleat Hur 170 Cartridge - 1 Micron	●	●				●												●
PPFS-HC-170-1	PP-Fail Safe Hur 170 Cartridge - 1 Micron	●	●				●												●

All-Poly - 100% polypropylene media with polypropylene end caps and components; also available in 10, 20 and 50 micron ratings

HC-PP-40-0.2	Hur 40 High Purity Pleated PP - 0.2 Mic	●	●				●												●
HC-PP-40-0.45	Hur 40 High Purity Pleated PP - 0.45 Mic	●	●				●												●
HC-PP-40-1	Hur 40 High Purity Pleated PP - 1 Mic	●	●				●												●
HC-PP-40-5	Hur 40 High Purity Pleated PP - 5 Mic	●	●				●												●
HC-PP-90-0.2	Hur 90 High Purity Pleated PP - 0.2 Mic	●	●				●												●
HC-PP-90-0.45	Hur 90 High Purity Pleated PP - 0.45 Mic	●	●				●												●
HC-PP-90-1	Hur 90 High Purity Pleated PP - 1 Mic	●	●				●												●
HC-PP-90-5	Hur 90 High Purity Pleated PP - 5 Mic	●	●				●												●
HC-PP-170-0.2	Hur 170 High Purity Pleated PP - 0.2 Mic	●	●				●												●
HC-PP-170-0.45	Hur 170 High Purity Pleated PP - 0.45 Mic	●	●				●												●
HC-PP-170-1	Hur 170 High Purity Pleated PP - 1 Mic	●	●				●												●
HC-PP-170-5	Hur 170 High Purity Pleated PP - 5 Mic	●	●				●												●

Hurricane® Cartridge Family

40 90 170

Sediment Removal
 Turbidity Reduction
 Chlorine Removal
 Taste & Odor Reduction
 Cyst Removal
 Pre-Filtration
 Post-Filtration
 Antimicrobial Rated
 Absolute Rated
 Nominal Rated
 100% Synthetic
 Non-Potable Use
 Course Filtration
 High Temperature
 All Polypropylene
 NSF Listed
 Cleanable/ Reusable

SureSafe Antimicrobial - reduces growth of bacteria and mold on media

HC/40-20-AM	Hur 40 Cartridge - 20 Micron	●	●					●												●
HC/40-50-AM	Hur 40 Cartridge - 50 Micron	●	●					●												●
HC/90-20-AM	Hur 90 Cartridge - 20 Micron	●	●					●												●
HC/90-50-AM	Hur 90 Cartridge - 50 Micron	●	●					●												●
HC/170-20-AM	Hur 170 Cartridge - 20 Micron	●	●					●												●
HC/170-50-AM	Hur 170 Cartridge - 50 Micron	●	●					●												●

Carbon Block - includes pleated 5 micron nominal pre-filtration; NSF 42 Listed

HC/40-AC-5	Hur 40 Cart. Carbon + 5 Mic Pre-filt	●	●	●	●							●								●
HC/90-AC-5	Hur 90 Cart. Carbon + 5 Mic Pre-filt	●	●	●	●							●								●
HC/170-AC-5	Hur 170 Cart. Carbon + 5 Mic Pre-filt	●	●	●	●							●								●

EZ Clean - 100% synthetic composite 50 micron media

HC/40-EZ-CLEAN	Hur Cartridge - EZ CLEAN - 50 Micron	●	●									●	●							●
HC/90-EZ-CLEAN	Hur Cartridge - EZ CLEAN - 50 Micron	●	●									●	●							●
HC/170-EZ-CLEAN	Hur Cartridge - EZ CLEAN - 50 Micron	●	●									●	●							●

Poly-Mesh - 100% synthetic composite 250 micron media

HC/170-PM	Hur 170 Cartridge Poly Mesh - 250 Micron	●	●									●	●							●
-----------	--	---	---	--	--	--	--	--	--	--	--	---	---	--	--	--	--	--	--	---

Cartridge Sizing Guide

Cleanable/ Reusable Hurricane® cartridges are cleanable and reusable in most applications and micron ratings (5 micron and up).

For Harmsco® Hurricane® and WaterBetter® Single-cartridge Filter Housings

Harmsco® recommends operation at 70% of maximum flow rate for optimum performance.

Polyester, High Temperature, Harmsco Free, SureSafe, EZ Clean, Poly-Mesh

Filter Model	Pleated Media Area (sq.ft.)	Length (in.)	O.D. (in.)	Max Flow Rate (GPM)	Recommended Flow Rate (GPM)	Max Flow Rate (LPM)	Max Flow Rate (M ³ /HR)	No./ Case	Carton Size
HUR 40 HP	40	9-5/8	7-3/4	Up to 50	35	Up to 189	Up to 12	1	9x9x11
HUR 90 HP	90	19-1/2	7-3/4	Up to 100	70	Up to 378	Up to 24	1	9x9x21
HUR 170 HP	170	30-3/4	7-3/4	Up to 150	105	Up to 568	Up to 36	1	9x9x32

Poly-Pleat

HUR 40 HP	25	9-5/8	7-3/4	-	15	-	-	1	9x9x11
HUR 90 HP	50	19-1/2	7-3/4	-	25	-	-	1	9x9x21
HUR 170 HP	100	30-3/4	7-3/4	-	50	-	-	1	9x9x32

All-Poly


HUR 40 HP	25	9-5/8	7-3/4	25	17	19	Up to 12	1	9x9x11
HUR 90 HP	50	19-1/2	7-3/4	50	35	38	Up to 24	1	9x9x21
HUR 170 HP	75	30-3/4	7-3/4	100	60 ^a	76	Up to 36	1	9x9x32

Carbon Block

HUR 40 HP	25	9-5/8	7-3/4	-	5 ^b	-	-	1	9x9x11
HUR 90 HP	55	19-1/2	7-3/4	-	10 ^b	-	-	1	9x9x21
HUR 170 HP	90	30-3/4	7-3/4	-	15 ^b	-	-	1	9x9x32

^a based on 1, 5, 10, 20 and 50 micron ratings

^b recommended flow for maximum chlorine removal

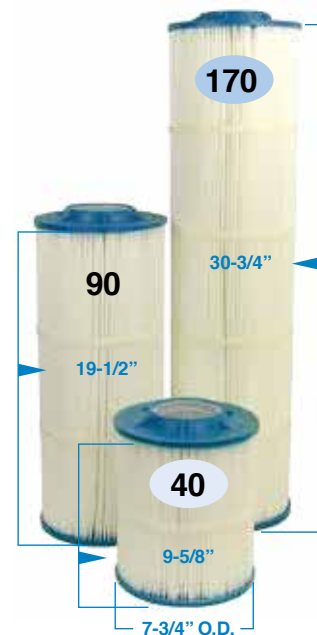


Hurricane® Cartridges
Length and O.D.

Cartridge Sizing Guide

Media Options

Polyester



NSF 61 Listed

High Temperature



Harmsco Free




NSF 61 Listed

Poly-Pleat (multi-layer)



NSF 61 Listed

All-Poly (multi-layer)



SureSafe (antimicrobial)



Carbon Block (5 Micron Pleated Pre-filter)



NSF 42 Listed


EZ Clean



Poly-Mesh



Harmsco® HP Hurricane® Filter Housings

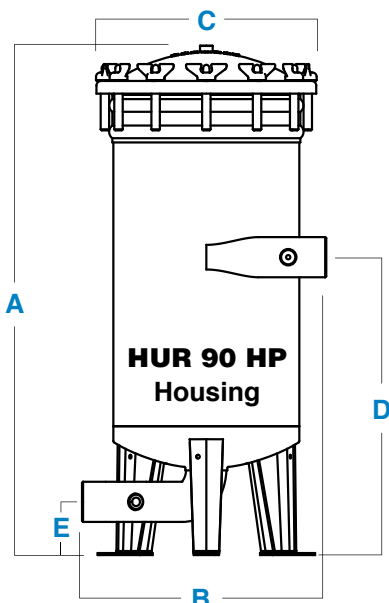
 Certified to
 ANSI-NSF 61

Excluding High Temp Cartridges



Ordering Information




Filter Model	A Filter Height	B Width	C Diameter	D Inlet	E Outlet	Pipe Size NPT	Drain Size NPT	Floor Space In.	Service Ht.	Shipping Wt. Lbs.	Carton Size In.
HUR 40 HP	19-1/2"	14-5/8"	13"	12-3/4"	3-7/16"	2"	1"	15x15	35"	40	14x16x21
HUR 90 HP	29-7/8"	14-5/8"	13"	17-3/4"	3-7/16"	2"	1"	15x15	51"	52	14x16x38
HUR 170 HP	40-1/2"	14-5/8"	13"	23-5/8"	3-7/16"	2"	1"	15x15	72"	64	14x16x42

Filter Specifications

- ▶ Electropolished 304 stainless steel*
- ▶ Standpipe - CPVC*
- ▶ Temperature - 140°F (60°C)* max. *Up to 250°F (121°C) with optional stainless steel standpipe and high temperature cartridges installed
- ▶ Pressure - 150 psi (10 bar) max.
- ▶ Wing nuts - brass
- ▶ Rim gaskets - EPDM (Buna-N, Viton available)
- ▶ BSTP optional
- ▶ Gauge sample ports (1/4"), inlet and outlet
- ▶ 90° elbow and 45° sweep on outlet for staggered in-line vertical installation

*All stainless steel housings are 304; 316 available upon request. Stainless steel standpipe for high temperature also available.

Pressure Drop

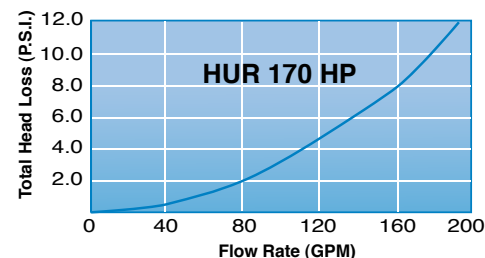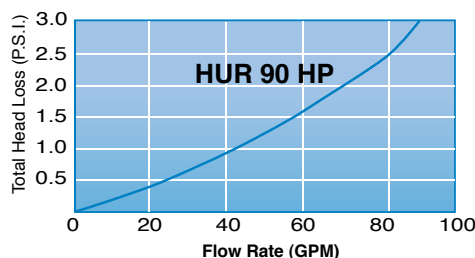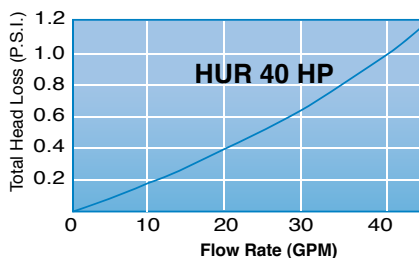

The total head loss data shown above was developed by NSF International and indicates pressure drop with Hurricane® filter housings and 20 micron filter cartridges in clean water.

Note: This publication is to be used as a guide. The data within has been obtained from many sources and is considered to be accurate. Harmsco does not assume liability for the accuracy and/or completeness of this data. Changes to the data can be made without notification. Temperature, Pressure, Flow Rates, Differential Pressures, Chemical Combinations and other unknown factors can affect performance in unknown ways. **Limited Warranty:** Harmsco warrants their products to be free of material and workmanship defects. Determination of suitability of Harmsco products for uses and applications contemplated by Buyer shall be the sole responsibility of Buyer. The end user/installer/buyer shall be liable for the product's performance and suitability regarding their specific intended