

## Nylon Tubing

### Series N: Flexible


Parflex flexible nylon tubing is carefully made from high-grade, abrasion resistant, heat and light stabilized nylon. Resistance to stress cracking greatly exceeds that of ordinary nylon tubing. Parflex nylon also exhibits extremely low level water absorption.

Chemical resistant Parflex nylon tubing has the additional benefits of better flexibility, lighter weight and resistance to flexural fatigue. Operating temperatures, depending upon conditions, are -65°F (-54°C) to +200°F (+93°C) continuous.

Available in natural (NN), red (RED), green (GRN), blue (BLU), yellow (YEL), and black (NB). Black tubing is recommended for use outdoors and in sunlit areas.



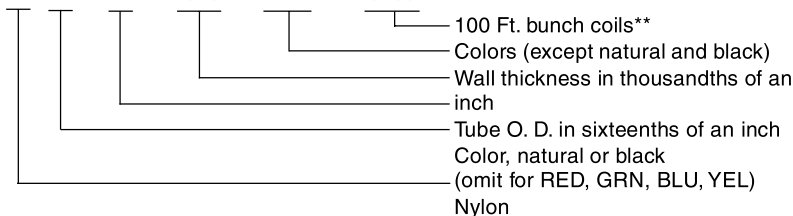




#### Order by tubing part number and name

**N N - 2 - 016 - RED - 0100**



#### Fitting Recommendations:

- Parker TrueSeal™ fittings
- Parker Fast & Tite® fittings

Nylon Part Number	Color	Nom. Tube O. D. in.	Nom. Tube I. D. in.	Avg. Wall Thick. in.	*Working Pressure at 73°F psi	Min. Burst Pressure at 73°F psi	Min. Bend Radius in.	Std. Reel Length ft.	Weight lbs. Per 100 ft.
#									
NN-2-016 NB-2-016	Natural Black	1/8	.093	.016	250	1000	1/4	250	0.25
NN-2-031 NB-2-031	Natural Black	1/8	.064	.031	500	2000	1/4	250	0.42
NN-2.5-025 NB-2.5-025	Natural Black	5/32	.106	.025	250	1000	1/2	250	0.47
NN-3-025 NB-3-025	Natural Black	3/16	.138	.025	250	1000	5/8	250	0.58
NN-3-046 NB-3-046	Natural Black	3/16	.096	.046	500	2000	7/16	250	0.93
NN-4-035 NB-4-035	Natural Black	1/4	.180	.035	250	1000	7/8	250	1.10
NN-4-040 NB-4-040	Natural Black	1/4	.170	.040	310	1250	7/8	250	1.20
NN-4-062 NB-4-062	Natural Black	1/4	.127	.062	500	2000	1/2	250	1.70
NN-5-040 NB-5-040	Natural Black	5/16	.233	.040	250	1000	1-1/8	250	1.56
NN-6-050 NB-6-050	Natural Black	3/8	.275	.050	250	1000	1-1/8	250	2.34
NN-6-093 NB-6-093	Natural Black	3/8	.190	.093	500	2000	3/4	250	3.80
NN-8-062 NB-8-062	Natural Black	1/2	.375	.062	250	1000	1-1/4	250	3.94
NN-8-124 NB-8-124	Natural Black	1/2	.253	.124	500	2000	1	250	6.70

**\*\*NEW**—Series N nylon tubing is now available in 100 ft. bunch coil package lengths. To order, add suffix 0100 to part number.  
 Example:  
 NN-4-035-0100

\*Suggested working pressure is 1/4 of burst pressure.