



## FLOPLUS PROTECT 20BB PFOA/PFOS FILTRATION SYSTEM



### APPLICATIONS

- ◆ Whole House

### FEATURES • BENEFITS

- ◆ Professional grade PFOA/PFOS reduction system for the home
- ◆ System is certified by IAPMO R&T to reduce up to 98% of PFOA/PFOS, commonly known as “forever chemicals”
- ◆ Maximum filtration with minimal pressure drop
- ◆ Integrated pressure relief valve for easier cartridge change-outs
- ◆ Complete system with cartridge, wrench, mounting bracket kit and manual

### INSTALLATION TIPS

- ◆ Choose a mounting location suitable to support the full weight of the system when operating.
- ◆ Make sure to properly lubricate O-ring prior to use.
- ◆ Install vertically with bowl hanging down.
- ◆ Allow 2-1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.

### OPERATION TIPS

- ◆ Replace cartridge if flow rate decreases.
- ◆ Do not exceed service flow rate.
- ◆ Inspect O-ring during each cartridge change. Lubricate and/or replace if necessary.


### SIZING

- ◆ Service Flow Rate: Maximum 5 gpm

### INCLUDES

- ◆ 20" filter housing
- ◆ 20" filter cartridge
- ◆ Wrench
- ◆ Mounting bracket with screws
- ◆ Installation and operation manual

# FLOPLUS PROTECT 20BB PFOA/PFOS FILTRATION SYSTEM

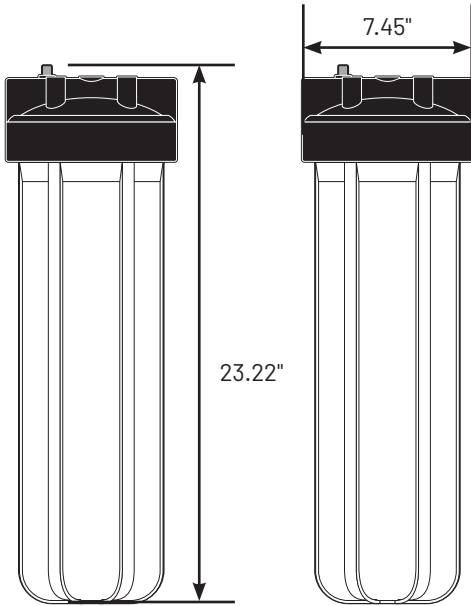

## SPECIFICATIONS

- ◆ **System (Model/Part No.)**  
FLOPLUS PROTECT 20BB  
PFOA/PFOS FILTRATION SYSTEM  
FloPlus Protect 20BB/150736 (1/Case)
- ◆ **Housing Size**  
20" Heavy duty
- ◆ **Inlet Size**  
1 1/2" FPT
- ◆ **Housing Material**  
Polypropylene
- ◆ **System Dimensions**  
23.22" H x 7.45" W  
(590 mm x 189 mm)
- ◆ **Cartridge Type**  
Fibredyne Carbon Block
- ◆ **Contaminant Reduction**  
PFOA/PFOS: Certified by IAPMO R&T  
against NSF/ANSI 53
- ◆ **Micron Rating**  
0.5
- ◆ **Approximate Filter Life\***  
4 - 5 months
- ◆ **Capacity**  
15,000 gallons (56,781 Liters)
- ◆ **Flow Rate**  
5 gpm (18.9 Lpm)
- ◆ **Certification**  
NSF/ANSI Std. 53
- ◆ **Feed Pressure Range**  
30 - 90 psi (2.06 - 6.20 bar)
- ◆ **Temperature Range**  
40° - 100°F (4.4 - 37.8°C)
- ◆ **Replacement Cartridge**  
(Model/Part No.)  
FloPlus Protect 20BB / 655223-43  
(6/Case)

\* Filter life dependent on gallon usage and overall incoming water quality.



The model FloPlus Protect 20BB is certified by IAPMO R&T against NSF/ANSI 53 for the reduction of perfluorooctanoic acid (PFOA) and perfluorooctane sulfonate (PFOS).