

ARIES CARTRIDGE SPECIFICATION SHEET

ARIES

NITRATE REDUCTION

INLINE SERIES, SINGLE BED CARTRIDGE

NITRATE REDUCTION

Nitrates are naturally occurring compounds that are formed when organic matter decomposes in nature. Nitrates are colorless, odorless and tasteless compounds and cannot be detected unless water samples are laboratory tested. The primary inorganic nitrates that may contaminate drinking water are potassium and ammonium nitrate both widely used in lawn and garden fertilizers. Most nitrogenous materials in natural waters tend to convert to nitrate so all sources of combined nitrogen; particularly organic nitrogen and ammonium should be considered as potential sources of contamination. The EPA defines maximum contaminant level (MCL) allowed in drinking water to be 10 mg/L $\text{NO}_3\text{-N}$ or 45 mg/ NO_3 . Certain populations should monitor nitrate levels to insure they do not suffer any ill health effects.

Aries nitrate reduction cartridges use ResinTech® SIR-100-HP resin. Its unique functionality offers twenty-five times greater nitrate affinity than standard strong-based anion resins. This cartridge reduces nitrates efficiently with low leakage, and eliminates the possibility of nitrate dumping upon exhaustion. Available with Quick Connect connectors in 6" and 12" lengths. Aries Inline filters cartridges are designed for low-flow, point-of-use filtration.

HIGHLIGHTS

- Highest Capacity Nitrate Removal
- Eliminates Nitrate Dumping
- Lot Control Traceability
- Resintech® SIR-100-HP
- Quality Produced & Made in the USA



APPLICATIONS


- Drinking Water

SPECIFICATIONS

- Nominal Rating of 25 μ
- Max Pressure of 125 psi (850 kPa)
- Max Temperature 100°F (38 °C)

DIMENSIONS	SERVICE FLOW		CAPACITY*		PART NUMBER
	gpm	lpm	gal	L	
6 x 2 in. (Quick Connect)	0.1	0.4	150	550	IFB-06-3610-QC
12 x 2 in. (Quick Connect)	0.2	0.8	300	1150	IFB-12-3610-QC

*Throughput is dependant upon water chemistry. Results may vary.

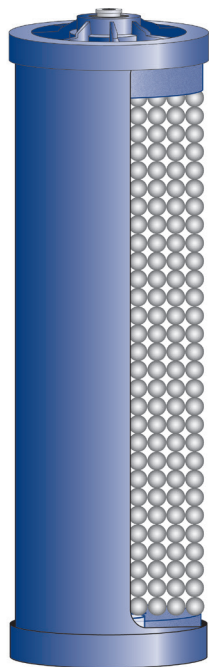

COMPONENTS

- End Caps - ABS
- Pads - PE
- Body - ABS
- Media - ResinTech® SIR-100-HP



**WE ARE PROUD TO BE
 ISO 9001 : 2015 CERTIFIED**

IMPORTANT NOTICE TO USER: The following is made in lieu of all other warranties expressed or implied. Manufacturer's and Seller's only obligation shall be to issue credit against the purchase or replacement of the equipment proved to be defective in material or workmanship. Neither Manufacturer nor Seller shall be liable for any injury, loss or damage, direct or indirect, special or consequential, arising out of the use of, misuse, or the inability to use such product. The information contained herein is based on technical data and tests which we believe to be reliable and is intended for use by persons having technical skill at their discretion and risk. Since conditions of use are outside ResinTech's control, we can assume no liability whatsoever for results obtained or damages incurred through the application of the data presented. This information is not intended as a license to operate under, or a recommendation to infringe upon, any patent of ResinTech's or others covering any material or use. The foregoing may not be altered except by written agreement signed by officers of the manufacturer.